


1/500

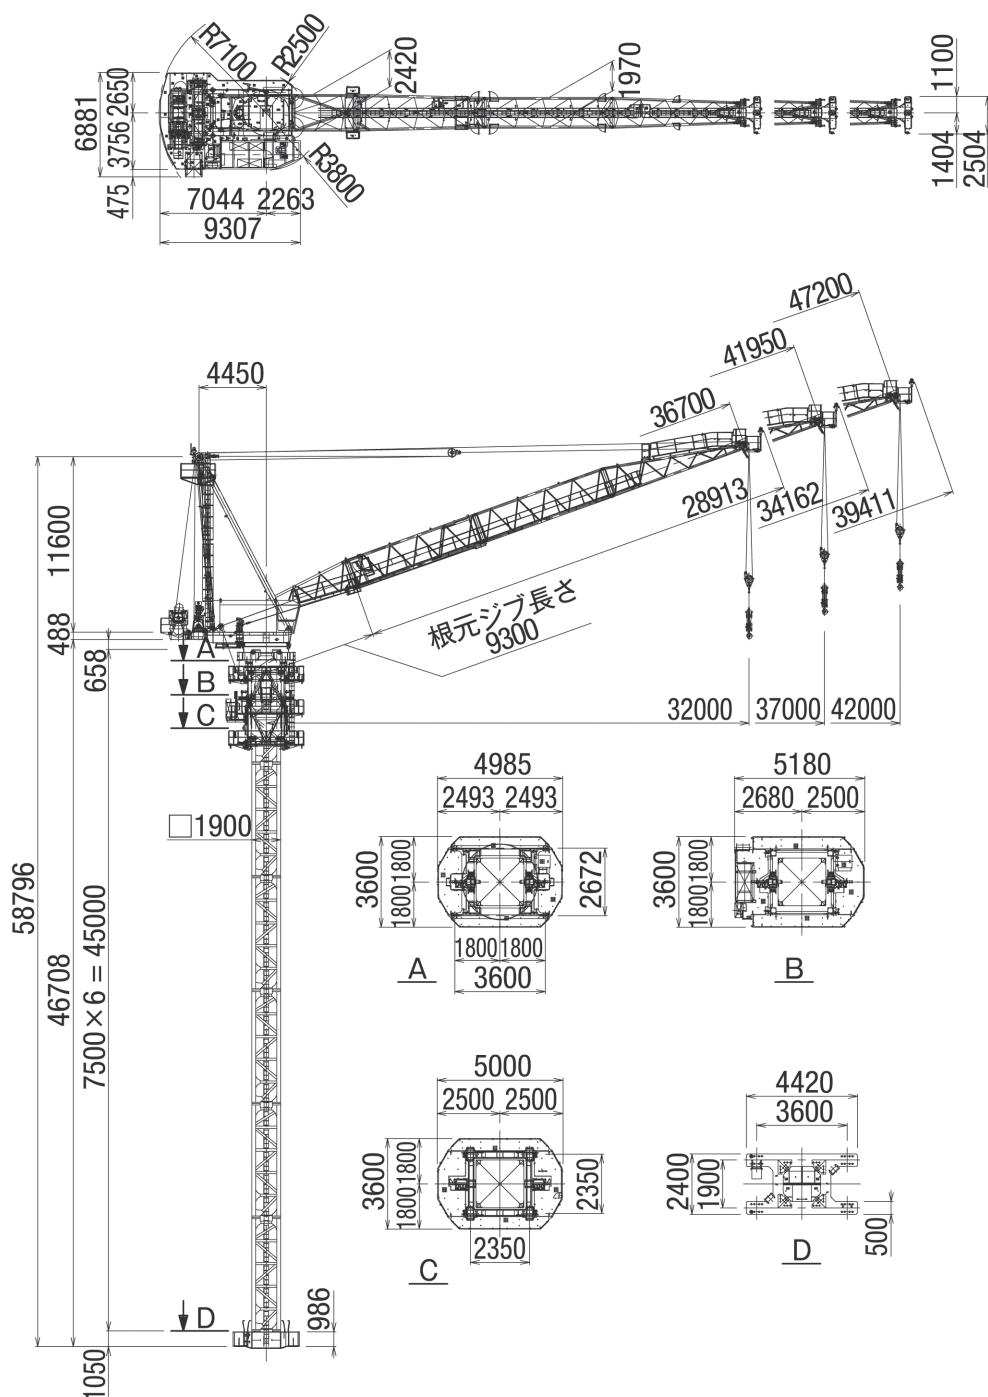

作業半径	最大定格荷重		
	32.0m	37.0m	42.0m
0.0m	11.50t	11.50t	11.50t
1.0m	13.92t	13.92t	13.92t
2.0m	16.34t	16.35t	16.35t
3.0m	18.78t	18.78t	18.78t
4.0m	20.00t	20.00t	20.00t
↓	↓	↓	↓
22.5m	↓	↓	20.00t
23.0m	↓	↓	19.56t
24.0m	↓	↓	18.73t
25.0m	↓	↓	17.96t
25.5m	↓	20.00t	17.60t
26.0m	↓	19.52t	17.26t
26.5m	20.00t	19.06t	16.92t
27.0m	19.60t	18.62t	16.60t
28.0m	18.80t	17.80t	15.99t
29.0m	18.00t	17.05t	15.42t
30.0m	17.26t	16.35t	14.88t
31.0m	16.60t	15.70t	14.38t
32.0m	16.00t	15.10t	13.90t
33.0m		14.53t	13.46t
34.0m		14.00t	13.06t
35.0m		13.49t	12.68t
36.0m		13.00t	12.33t
37.0m		12.50t	12.00t
38.0m			11.68t
39.0m			11.38t
40.0m			11.09t
41.0m			10.79t
42.0m			10.50t
43.0m			
44.0m			
45.0m			
46.0m			
47.0m			

名称			JCC-TS500S				
定格荷重	t		16	12.5	10.5		
作業半径	m		32	37	42		
揚 程	m		250m				
速度	巻上	m/min		28.2 - 121.8			
	起伏	sec		103			
	旋回	r.p.m		0.51			
	昇降	m/min	50/60Hz	重負荷 : 0.45/0.55 (押出)	0.70/0.86 (引込)		
電動機	巻上	kW		軽負荷 : 0.90/1.10 (押出)			
	起伏			1.40/1.72 (引込)			
	旋回			110			
	昇降			30			
操 作			運転室				
電源容量	kVA・A		220・400				
電 源	V	50/60Hz	400/440				