



伸縮架台仕様 (オプション)



定格荷重表

作業半径 (m)	13T x 35M	10T x 40M	8T x 45M
	40.50mジブ	45.67mジブ	50.84mジブ
0	7.50	7.50	10.50
1	20.00	20.00	18.00
2	20.00	20.00	18.00
3	20.00	20.00	18.00
4	20.00	20.00	18.00
5	20.00	20.00	18.00
6	20.00	20.00	18.00
7	20.00	20.00	18.00
8	20.00	20.00	18.00
9	20.00	20.00	18.00
10	20.00	20.00	18.00
11	20.00	20.00	18.00
12	20.00	20.00	18.00
13	20.00	20.00	18.00
14	20.00	20.00	18.00
15	20.00	20.00	18.00
16	20.00	20.00	18.00
17	20.00	20.00	18.00
18	20.00	20.00	18.00
19	20.00	20.00	17.40
20	20.00	19.30	16.70
21	20.00	18.70	16.10
22	20.00	18.00	15.50
23	20.00	17.40	14.90
24	20.00	16.70	14.30
25	19.30	16.10	13.80
26	18.70	15.50	13.20
27	18.00	14.90	12.70
28	17.30	14.40	12.20
29	16.70	13.90	11.80
30	16.00	13.40	11.40
31	15.40	13.00	11.00
32	14.80	12.60	10.70
33	14.20	12.20	10.40
34	13.60	11.80	10.10
35	13.00	11.50	9.80
36		11.20	9.60
37		10.90	9.40
38		10.60	9.20
39		10.30	9.00
40		10.00	8.80
41			8.60
42			8.50
43			8.30
44			8.20
45			8.00

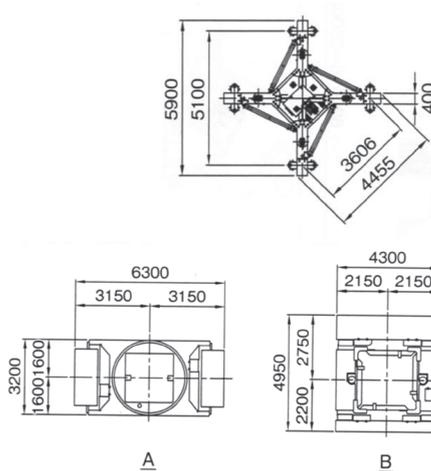

仕様

最大揚程 (m)	210	205	200	
最大設置高さ (m)	205	200	190	
起 伏	m/s	0.30	0.35	0.31
	s	108	106	135
	ノッチ	1~4		5
巻上	荷重 (t)	20		20~2
	速度 m/s	0.04~0.5		0.5~1.7
	m/min	2~30		30~100
旋 回	rad/s		0.054	
	rpm		0.52	
電 動 機	巻上	130kW 4P 40%ED インバータ制御		
	起 伏	37kW 4P インバータ制御		
	旋 回	15kW 4P インバータ制御		
	電源	400V 50Hz(440V 60Hz)		
安全装置	モーメントリミッタ 巻過防止装置			
	起伏制限装置 作業範囲制限装置			
記 事	自立高さ「42m」: M17+BM+SM*5 電源容量: 230KVA			