


■主要寸法図 (単位: mm)

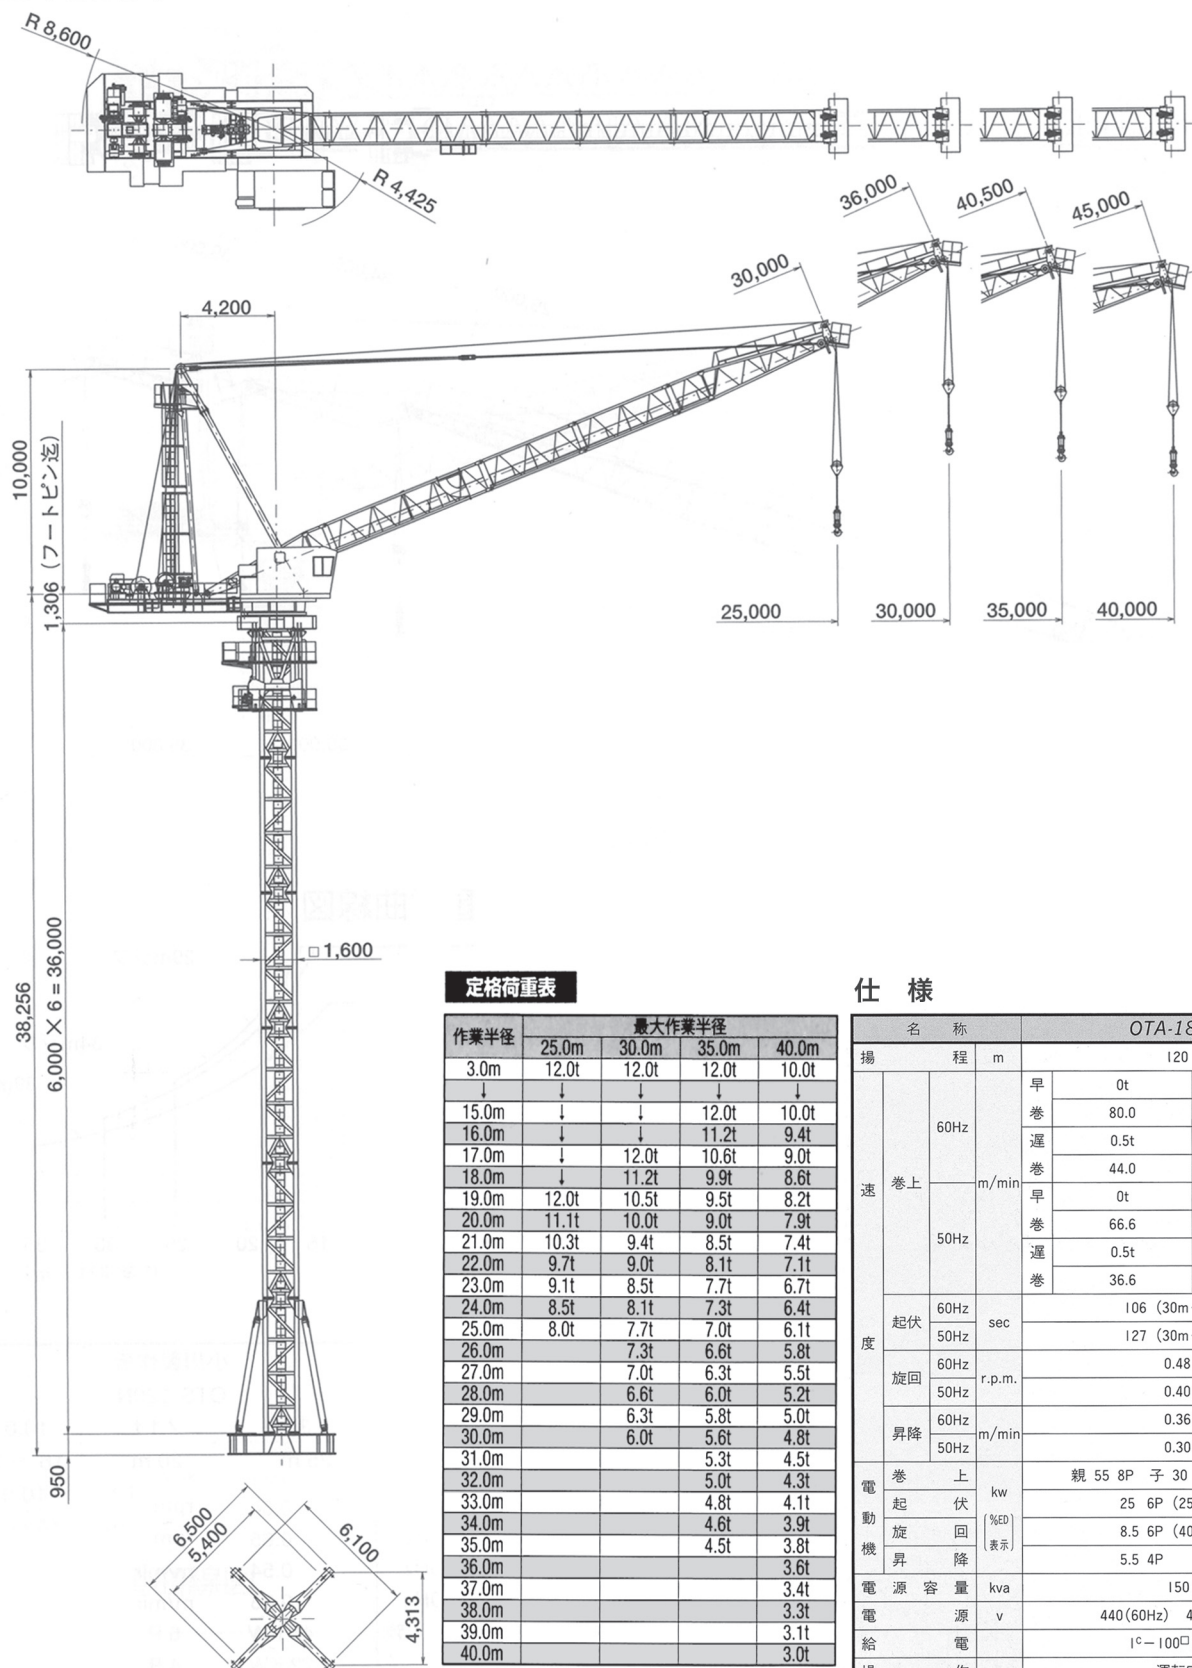

定格荷重表

作業半径	最大作業半径			
	25.0m	30.0m	35.0m	40.0m
3.0m	12.0t	12.0t	12.0t	10.0t
↓	↓	↓	↓	↓
15.0m			12.0t	10.0t
16.0m			11.2t	9.4t
17.0m		12.0t	10.6t	9.0t
18.0m		11.2t	9.9t	8.6t
19.0m	12.0t	10.5t	9.5t	8.2t
20.0m	11.1t	10.0t	9.0t	7.9t
21.0m	10.3t	9.4t	8.5t	7.4t
22.0m	9.7t	9.0t	8.1t	7.1t
23.0m	9.1t	8.5t	7.7t	6.7t
24.0m	8.5t	8.1t	7.3t	6.4t
25.0m	8.0t	7.7t	7.0t	6.1t
26.0m		7.3t	6.6t	5.8t
27.0m		7.0t	6.3t	5.5t
28.0m		6.6t	6.0t	5.2t
29.0m		6.3t	5.8t	5.0t
30.0m		6.0t	5.6t	4.8t
31.0m			5.3t	4.5t
32.0m			5.0t	4.3t
33.0m			4.8t	4.1t
34.0m			4.6t	3.9t
35.0m			4.5t	3.8t
36.0m				3.6t
37.0m				3.4t
38.0m				3.3t
39.0m				3.1t
40.0m				3.0t

仕様

名称		OTA-180N	
揚程	m	120	
		0t	
		80.0	
		40.0	
		0.5t	
		12t	
		44.0	
		22.0	
		0t	
		6t	
速度	m/min	60Hz	50Hz
度	sec	60Hz	50Hz
機	r.p.m.	60Hz	50Hz
電	m/min	60Hz	50Hz
動	kw	60Hz	50Hz
機	kva	60Hz	50Hz
源	v	60Hz	50Hz
給	m	60Hz	50Hz
作	m	60Hz	50Hz
架	m	60Hz	50Hz