


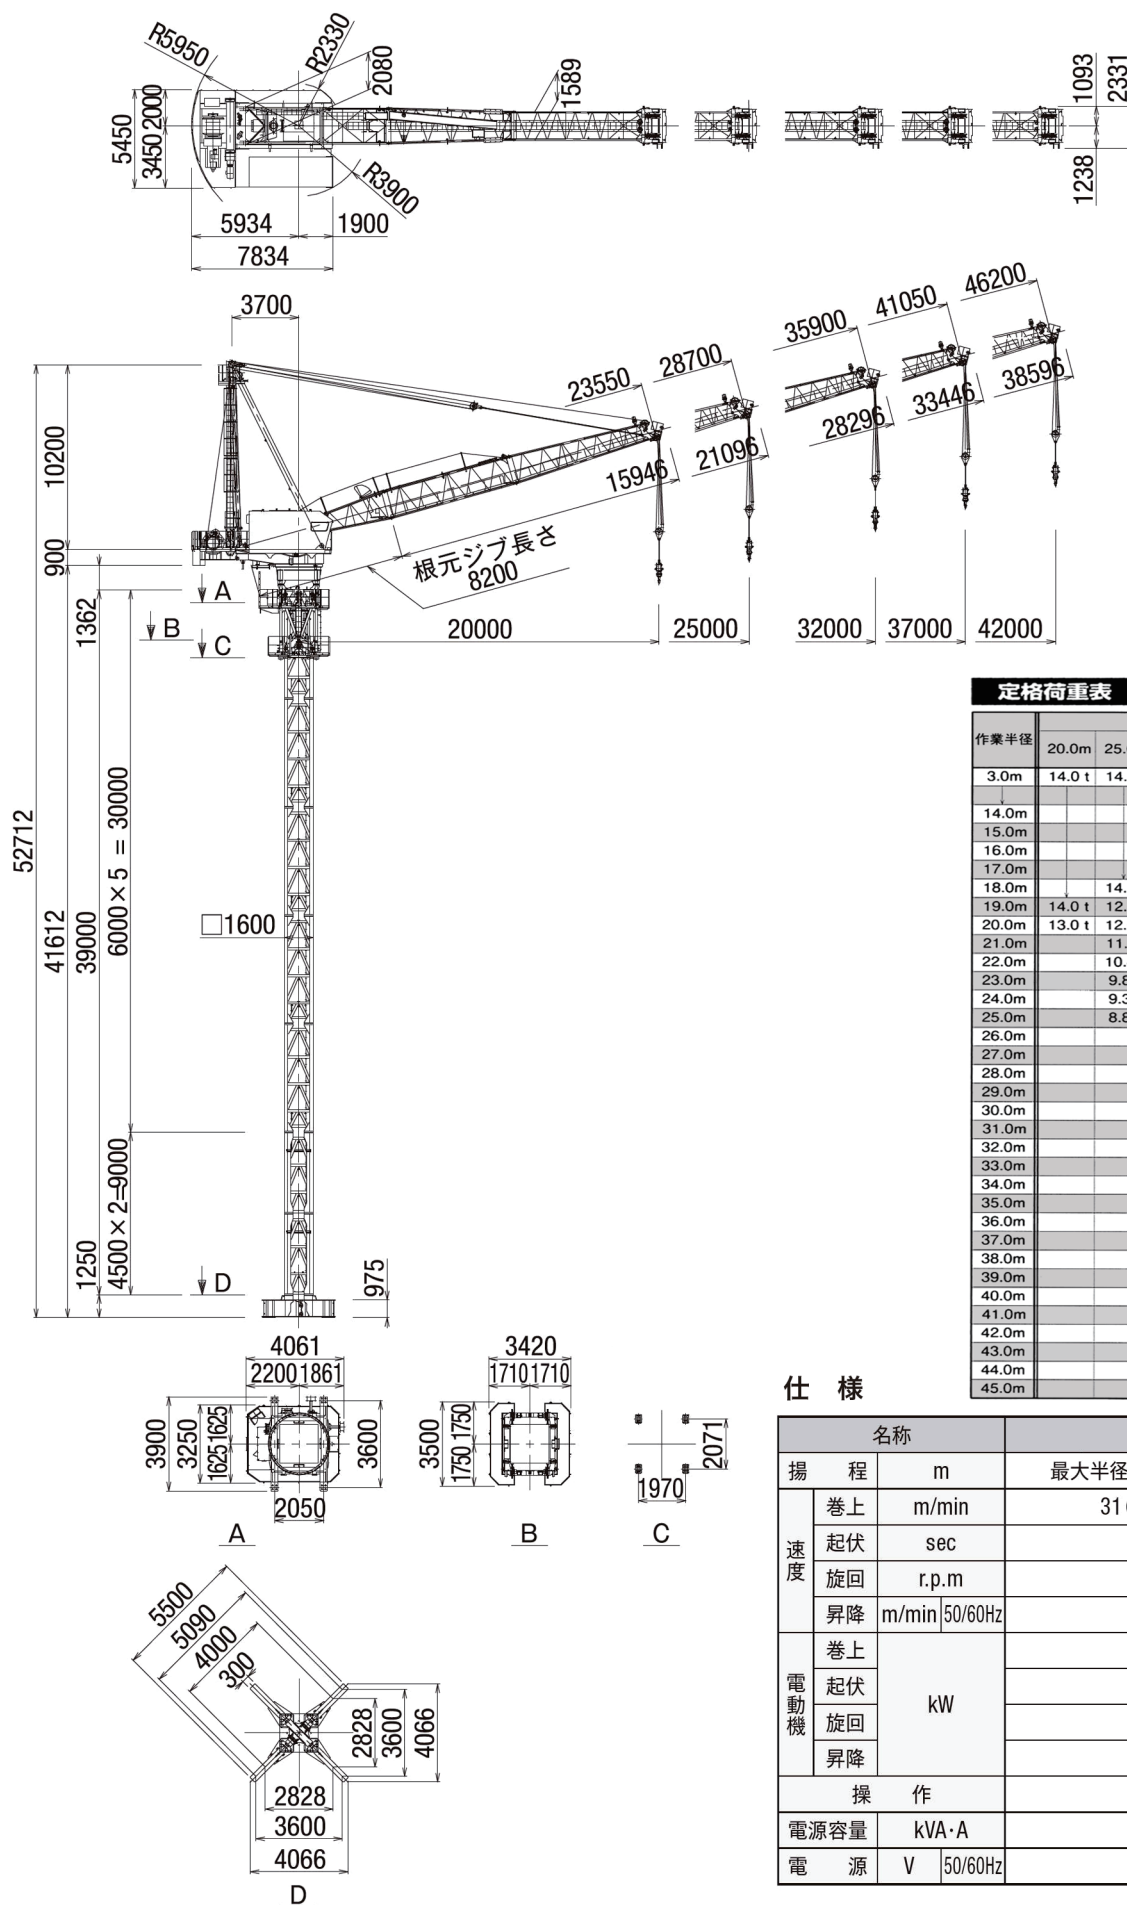

定格荷重表

作業半径	最大作業半径 (オプション)					
	20.0m	25.0m	32.0m	37.0m	42.0m	45.0m
3.0m	14.0 t	14.0 t	14.0 t	14.0 t	10.0 t	8.0 t
14.0m						8.0 t
15.0m				14.0 t	10.0 t	7.7 t
16.0m			14.0 t	12.9 t	9.5 t	7.4 t
17.0m			12.9 t	12.0 t	9.1 t	7.1 t
18.0m		14.0 t	11.9 t	11.2 t	8.6 t	6.8 t
19.0m	14.0 t	12.9 t	11.1 t	10.4 t	8.2 t	6.5 t
20.0m	13.0 t	12.0 t	10.4 t	9.8 t	7.9 t	6.2 t
21.0m		11.2 t	9.7 t	9.2 t	7.5 t	6.0 t
22.0m		10.4 t	9.2 t	8.7 t	7.1 t	5.7 t
23.0m		9.8 t	8.7 t	8.2 t	6.8 t	5.5 t
24.0m		9.3 t	8.2 t	7.8 t	6.5 t	5.2 t
25.0m		8.8 t	7.8 t	7.4 t	6.2 t	5.0 t
26.0m			7.4 t	7.0 t	5.9 t	4.7 t
27.0m			7.1 t	6.7 t	5.7 t	4.5 t
28.0m			6.8 t	6.3 t	5.4 t	4.3 t
29.0m			6.5 t	6.0 t	5.1 t	4.1 t
30.0m			6.2 t	5.8 t	4.9 t	3.8 t
31.0m			6.0 t	5.5 t	4.7 t	3.7 t
32.0m			5.7 t	5.3 t	4.4 t	3.5 t
33.0m				5.0 t	4.2 t	3.3 t
34.0m				4.8 t	4.0 t	3.2 t
35.0m				4.6 t	3.8 t	3.0 t
36.0m				4.4 t	3.6 t	2.9 t
37.0m				4.2 t	3.5 t	2.8 t
38.0m					3.3 t	2.7 t
39.0m					3.1 t	2.6 t
40.0m					3.0 t	2.4 t
41.0m					2.8 t	2.4 t
42.0m					2.7 t	2.3 t
43.0m						2.2 t
44.0m						2.1 t
45.0m						2.0 t

仕様

名称			OTA-190S	
揚程	m		最大半径時100 最小半径時200	
速度	巻上	m/min		31 (14t) / 115 (2.5t)
	起伏	sec		120
	旋回	r.p.m		0.49
	昇降	m/min	50/60Hz	0.5 / 0.6
電動機	巻上	kW		90
	起伏			22
	旋回			9.75
	昇降			15
操 作			運転室	
電源容量		kVA・A		200・400
電 源	V	50/60Hz	400/440	