



■主要寸法図 (単位: mm)

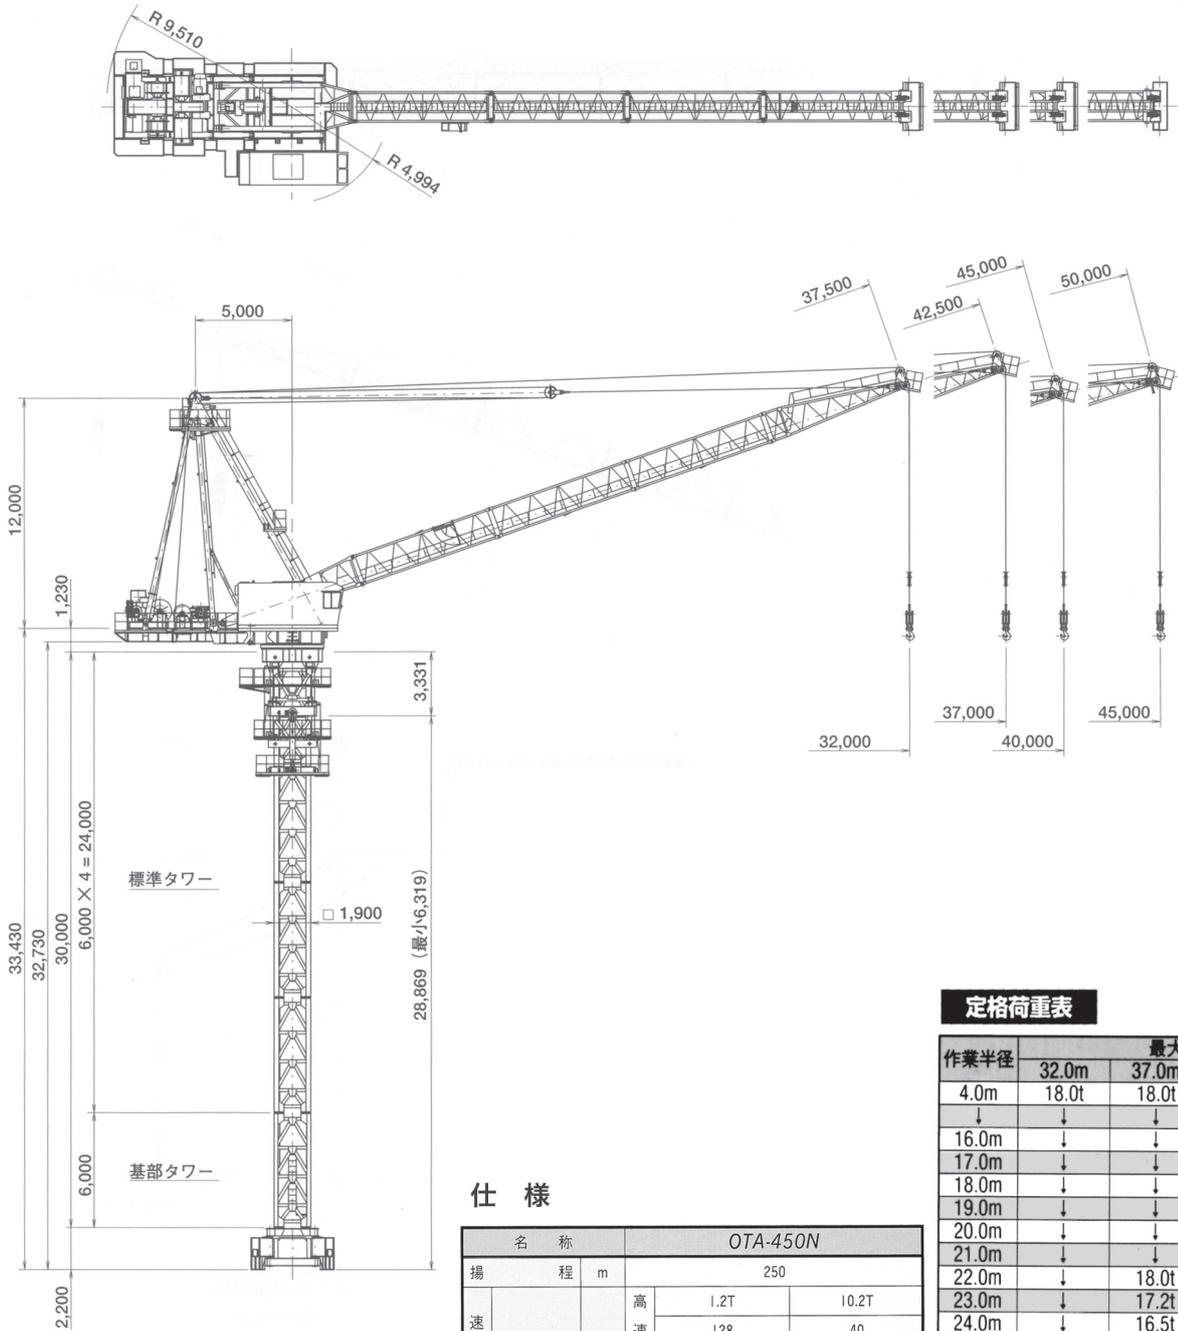

■台座平面図 (単位: mm)

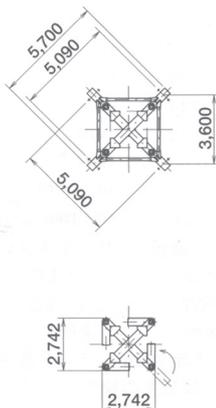

仕様

名称		OTA-450N	
場	程 m	250	
速	巻上 m/min	高速	1.2T 10.2T
		低速	128 40
	起 伏 sec	80	25
		旋 回 r.p.m	0.48
度	クライミング	60Hz 0.36	
	昇 降	50Hz 0.30	
	電	巻上 kw	110
動	起 伏 kw	45 6P	
	旋 回 kw	15 6P (40%ED)	
	クライミング昇降	15 4P	
	機	電 源 容 量 kva	250
電	源 v	440/60Hz 400/50Hz	
給	電 v	1φ-150□×3本	
操	作	運転室	
自	立マスト最高高さ m	30	
架	台	平面架台	

定格荷重表

作業半径	最大作業半径			
	32.0m	37.0m	40.0m	45.0m
4.0m	18.0t	18.0t	18.0t	14.0t
16.0m	↓	↓	↓	14.0t
17.0m	↓	↓	↓	13.4t
18.0m	↓	↓	18.0t	13.0t
19.0m	↓	↓	17.2t	12.6t
20.0m	↓	↓	16.5t	12.1t
21.0m	↓	↓	15.9t	11.8t
22.0m	↓	18.0t	15.4t	11.4t
23.0m	↓	17.2t	14.9t	11.1t
24.0m	↓	16.5t	14.4t	10.8t
25.0m	18.0t	15.8t	14.0t	10.5t
26.0m	16.9t	15.3t	13.5t	10.2t
27.0m	16.2t	14.7t	13.2t	9.9t
28.0m	15.6t	14.2t	12.8t	9.6t
29.0m	15.0t	13.7t	12.5t	9.4t
30.0m	14.6t	13.3t	12.2t	9.2t
31.0m	14.2t	12.9t	11.8t	8.9t
32.0m	14.0t	12.6t	11.5t	8.6t
33.0m		12.3t	11.2t	8.4t
34.0m		11.9t	11.0t	8.2t
35.0m		11.6t	10.8t	8.1t
36.0m		11.3t	10.6t	7.9t
37.0m		11.0t	10.4t	7.8t
38.0m			10.2t	7.7t
39.0m			10.1t	7.6t
40.0m			10.0t	7.5t
41.0m				7.4t
42.0m				7.3t
43.0m				7.2t
44.0m				7.1t
45.0m				7.0t