


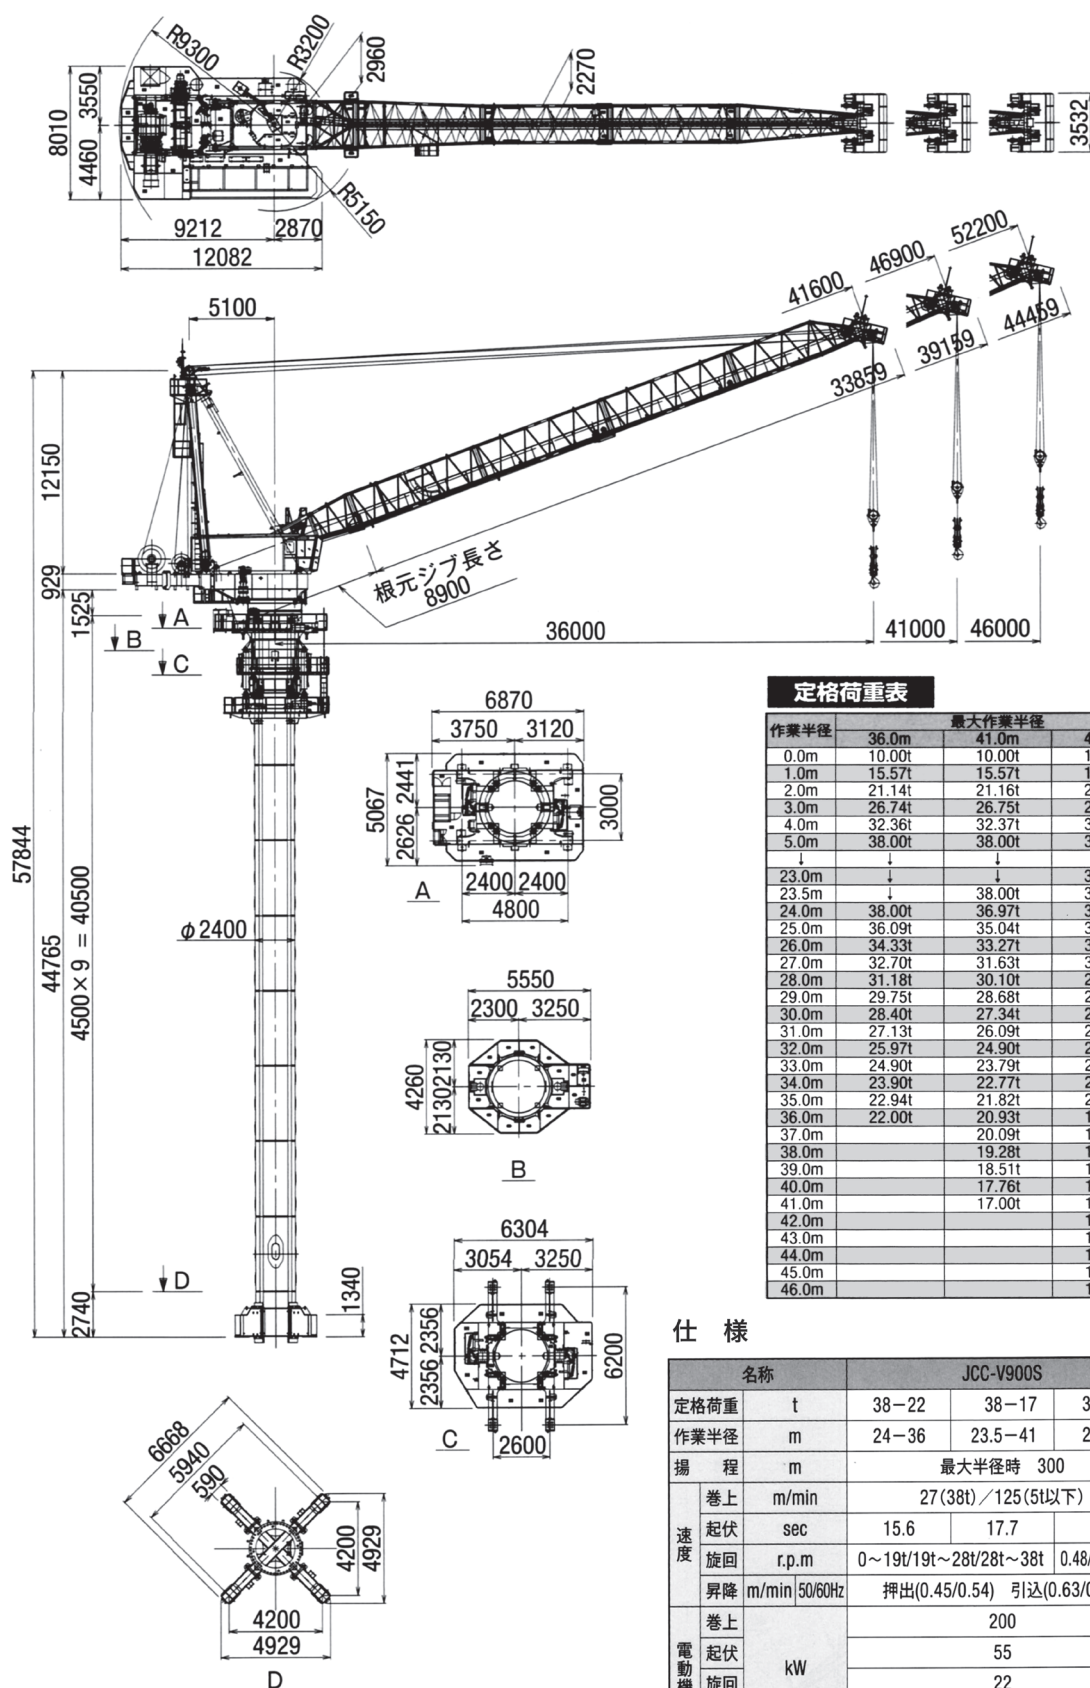

定格荷重表

作業半径	最大作業半径		
	36.0m	41.0m	46.0m
0.0m	10.00t	10.00t	10.00t
1.0m	15.57t	15.57t	15.58t
2.0m	21.14t	21.16t	21.17t
3.0m	26.74t	26.75t	26.76t
4.0m	32.36t	32.37t	32.37t
5.0m	38.00t	38.00t	38.00t
↓	↓	↓	↓
23.0m			38.00t
23.5m		38.00t	36.94t
24.0m	38.00t	36.97t	35.92t
25.0m	36.09t	35.04t	34.01t
26.0m	34.33t	33.27t	32.25t
27.0m	32.70t	31.63t	30.62t
28.0m	31.18t	30.10t	29.10t
29.0m	29.75t	28.68t	27.69t
30.0m	28.40t	27.34t	26.36t
31.0m	27.13t	26.09t	25.12t
32.0m	25.97t	24.90t	23.95t
33.0m	24.90t	23.79t	22.85t
34.0m	23.90t	22.77t	21.80t
35.0m	22.94t	21.82t	20.82t
36.0m	22.00t	20.93t	19.91t
37.0m		20.09t	19.06t
38.0m		19.28t	18.26t
39.0m		18.51t	17.51t
40.0m		17.76t	16.80t
41.0m		17.00t	16.12t
42.0m			15.47t
43.0m			14.84t
44.0m			14.23t
45.0m			13.62t
46.0m			13.00t

仕様

名称		JCC-V900S		
定格荷重	t	38-22	38-17	38-13
作業半径	m	24-36	23.5-41	23-46
揚程	m	最大半径時 300		
巻上	m/min	27(38t)/125(5t以下)		
起伏	sec	15.6	17.7	19.4
旋回	r.p.m	0~19t/19t~28t/28t~38t 0.48/0.30/0.20		
昇降	m/min 50/60Hz	押出(0.45/0.54) 引込(0.63/0.76)		
巻上	kW	200		
起伏		55		
旋回		22		
昇降		30		
操 作		運転室		
電源容量	kVA・A	500・600		
電 源	V 50/60Hz	400/440		